

LBB54 BUBBLE LAMP

Assembly Instructions




STEP 1:

Remove the black rubber cap from the top of the bubble pillar and place it in a safe place.


STEP 2:

Unscrew the screws that secure the base to the wood of the pillar, place screws in a safe place.

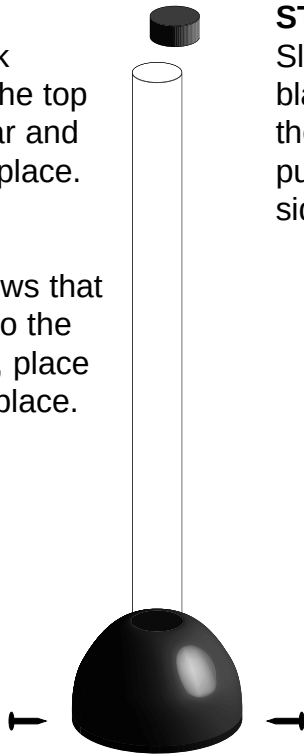


STEP 3:

Slide the black base up the pillar and put on the side

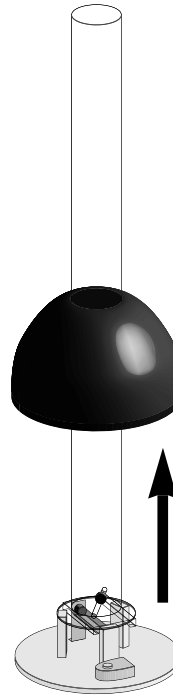


STEP 4:

To change colors, use the filters supplied in the envelope and slide into slot.

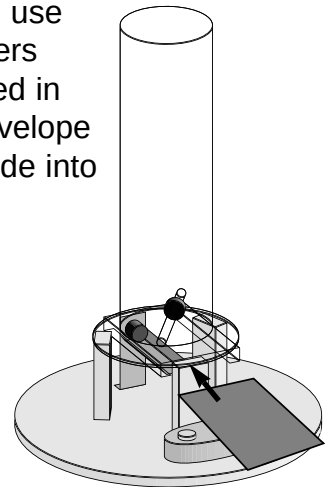

STEP 5:

Remove the bulb from its box. **MAKE SURE THE LAMP IS UNPLUGGED.** Screw the bulb into the socket.

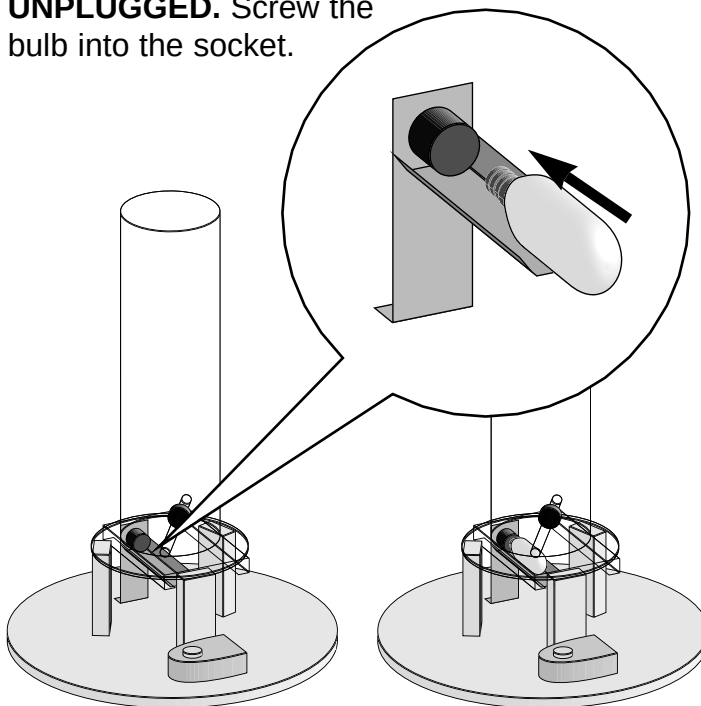

STEP 6:

Slide black base down over pillar and secure it to the base using screws.

STEP 7:

Fill pillar, leaving 1" of space to top of pillar. Use **DISTILLED WATER ONLY** to fill pillar. Distilled water will prevent the growth of bacteria, and the need to frequently replace the water in the pillar. Pillar holds about a gallon and a half of water.

STEP 8:

Replace the black rubber cap and dry off pillar from any excess water.

STEP 9:

Be sure to read the safety instructions included in the packaging, before plugging in your lamp.

